

Completely chemical-free!



Ideal for professional service provider in the garden-, municipal and building cleaning industry

pipe with handle: wall thickness of 3 mm and length of 1,100 mm for professional applications


Suitable for low and high pressure

ST-2605 **LTF**  
Our spray gun ST-2605 with the patented LTF technology is recommended for effortless working.

Useable at the left or right: the handle at the side optimises the handling and protects during hot water applications.

### The professional surface cleaner for sustainable weed control

- completely made out of stainless steel
- a working width of 400 mm
- 4 nozzles 1/4" M NPT are required
- for the application you need a hot-water device that works with a water temperature of at least 90 °C
- 1/4" nozzles have the ideal spraying angle of 65°
- robustly industrial castors: Ø 260 mm
- energetically developed housing for effective use of hot water
- swivelling application on sloping and vertical areas is possible
- suitable for low and high pressure applications: 0 - 350 bar
- max. temperature: 120 °C
- working temperature: 90 °C - 99 °C

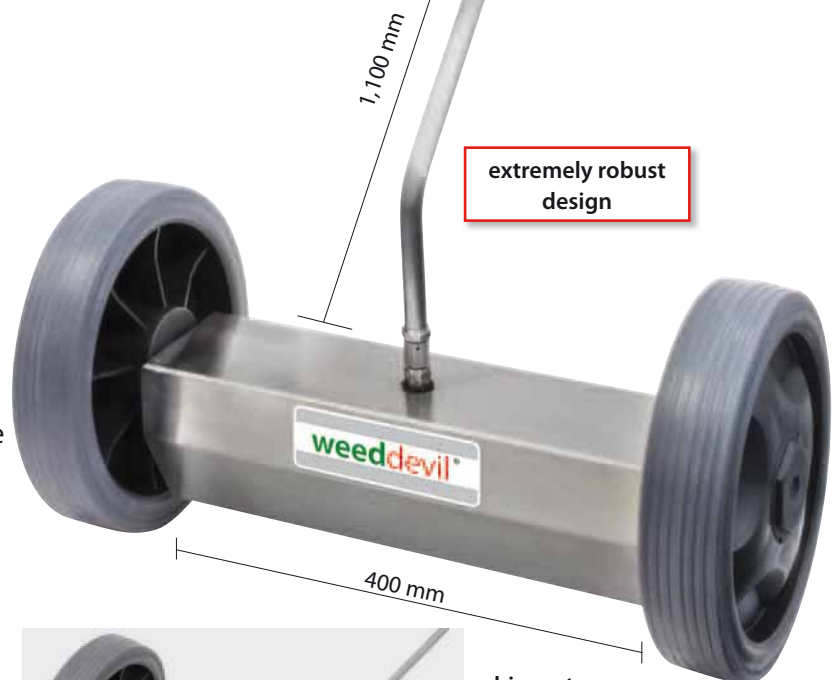

extremely robust design



**big castors:** easy manoeuvring in curves and around obstacles, even on uneven undergrounds.

**At the underside:** concentrated and well-directed hot water without any temperature loss by an optimally designed housing having a perfect cleaning distance.

R+M Nr.	material	castors ø	working width	inlet	outlet	pressure	temperature	weight	height / width
200 097 700	stainl. steel	260 mm	400 mm	1/4" F	4 x 1/4" F	max. 350 bar	120 °C	7.4 kg	1,250 / 530 mm